


NC à POINTER 90 / 130°

90 / 130° NC SPOTTING DRILL

Precision **6μ**

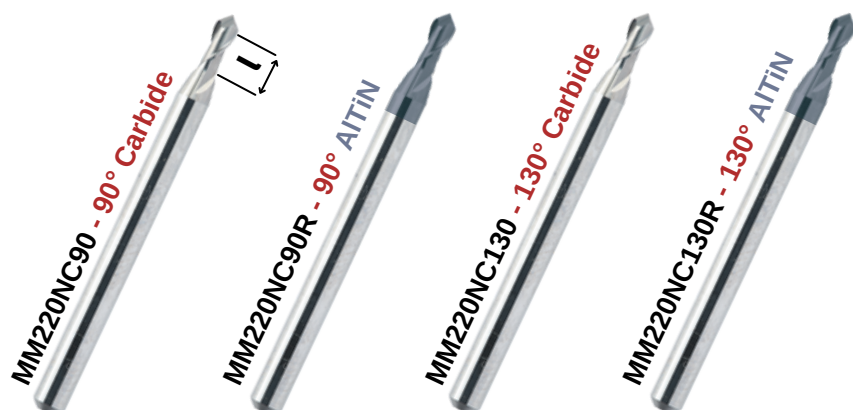

Ø	l	€	€	€	€
0.10	0.2	22.75	34.75	22.75	34.75
0.15	0.3	21.00	33.00	21.00	33.00
0.20	0.4	18.00	30.00	18.00	30.00
0.25	0.5	18.00	30.00	18.00	30.00
0.30	0.6	16.00	28.00	16.00	28.00
0.40	0.8	16.00	28.00	16.00	28.00
0.50	1.0	16.00	28.00	16.00	28.00
0.80	1.6	16.00	28.00	16.00	28.00
1.0	2.0	16.00	28.00	16.00	28.00
1.5	3.0	16.00	28.00	16.00	28.00
2.0	4.0	16.00	28.00	16.00	28.00
2.5	5.0	16.00	28.00	16.00	28.00
3.0	6.0	17.00	29.00	17.00	29.00

AlTiN

90°

2-3μ

3750 HV



α : 90 / 130° +/- 1°

z : 2 - 30°

Tol Ø : 0 / -6μ

Tol queue/shank : 3.00 h5

Carbure-Carbide MG 10% Co

L=38

Minimax